



Hand Operated Curtain Track Systems





Hand Operated Curtain Track System

Silent Gliss® 3840W

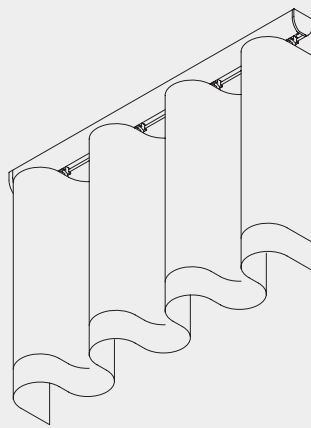

Product Information


- For use with Wave Standard and Wave XL curtain heading systems
- Purpose designed for ceiling fixing - neat attractive track
- Ideal for contract or domestic use
- Same appearance from both sides
- Standard length 19.7'; can be joined
- Standard colours: silver, white, gold, bronze, black
- For medium weight curtains
- Can be bent



3840W

When splicing on a gradual curve, each side of the track by the splice must have a straight piece of profile of 3 1/6" on both Sides (totaling 6 1/3" of straight profile)

Profile, Bending and Specification Information



Standard radius 7.87 in.
Wave XL: Min. radius 19.69 in.



Note: It is important to observe the minimum bending radius for Wave XL. The system will not function with a smaller radius.

Specification Guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 3840W curtain track, hand drawn, anodised aluminium, assembled complete with wave glider-cord 6345/6346. Top fix with special fixing clamp 3825/special fixing bracket 3832 at max 600mm. centres each screwed to timber/plugged and screwed to block/concrete.
Lm.

How To Measure

Stack depth Wave Standard



a = Stack depth
b = Stack size
c = Min. distance

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
2.36"	3.94"	190%	3.94"	23% +endpiece	3.15"
2.36"	4.72"	220%	4.72"	23% +endpiece	2.54"
3.15"	5.51"	200%	5.51"	180% +endpiece	3.94"
3.15"	6.3"	220%	6.3"	180% +endpiece	4.33"


Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
3.15"	5.51"	200%	5.51"	210% +endpiece	3.94"
3.15"	6.3"	220%	6.3"	210% +endpiece	4.33"

(dimensions in in.)

Note: Minimum distance (c) includes a standard 1.77 in. clearance (front and back).

Stack Size calculation Wave XL




a = Stack depth 35cm
b = Stack size
c = Min. distance 22cm

System width		30.3-42.1	42.52- 56.3	56.7- 70.5	70.9-84.6	85.04 - 98.81	99.2- 112.9	113.4-127.2	127.6 - 141.3	141.7 - 155.5
	b	11.02	12.9	14.96	16.93	18.89	20.87	22.83	24.8	26.77
System width		155.9-169.7	170.1-184.3	184.6-198.03	198.4-212.2	212.6-336.38	226.7-236.2			
	b	28.74	30.7	32.68	34.65	36.61	38.58			
System width		60.6- 85.4	85.8- 113.7	114.2-142.1	142.5-170.5	170.9- 198.8	199.2- 227.2	227.6- 236.2		
	b	11.02	12.9	14.96	16.93	18.9	20.87	22.83		

(dimensions in in.)

System Options

Wave Standard curtain heading system



Wave is an exciting new contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m or 10kg/m with wave roller glider 6098W.

The Wave standard components are:

6345 Glider Cord 60mm
6346 Glider Cord 80mm
6007 End stop

The items listed below are all supplied at an additional cost as per the price list.

Wave hardware components for Enhanced Wave are:

2255 Adjustable brake
6364 Extension (used with 6365)
6365 Hanger (used with 6364)
6366 Carrier for draw rod


Roller Gliders must be ordered separately
6098W Wave roller glider 80mm

Optional enhanced components to improve the presentation of the curtain:


3582 Hook
6349 Curtain tape
6363 Iron-on top hemming tape
10075 Lead weight for hem of curtain 50gr/m
10076 Fabric weight for side edge of curtain




3840W

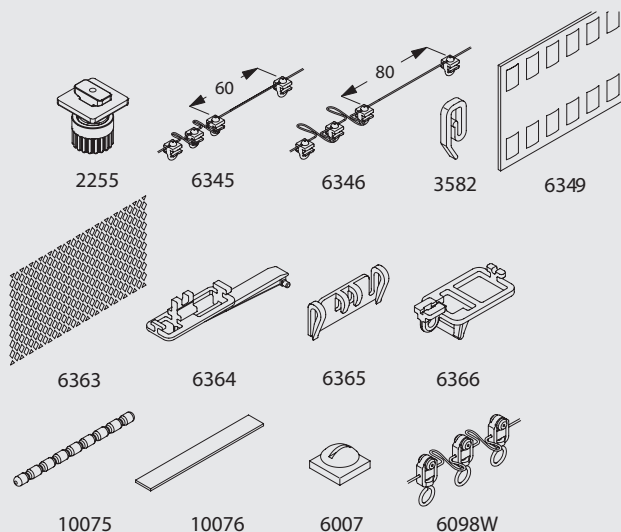

Wave XL curtain heading system



Wave XL is especially designed for high and large application areas through generously designed waves with large cross section dimensions.

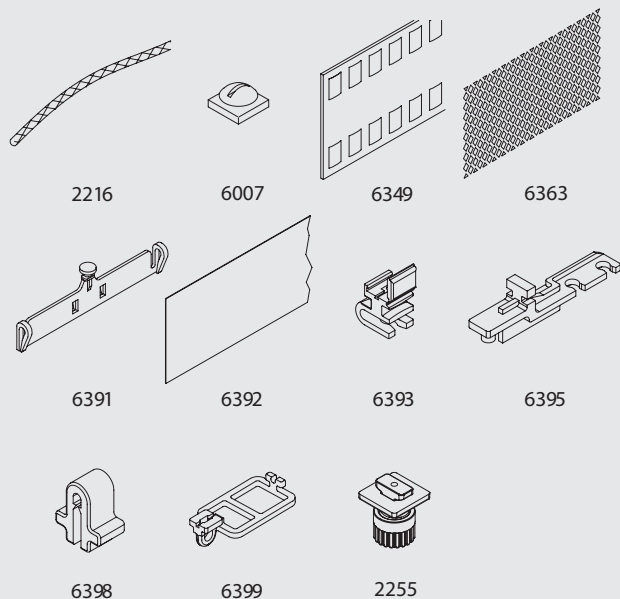


The Wave XL components are:

2216 Cord **0.03 in.**
 2255 Adjustable brake
 6007 End stop
 6349 Curtain tape
 6363 Iron tape
 6382 Limit stop
 6391 Hanger
 6392 Heading film
 6393 Glider
 6394 Carrier
 6395 Extension
 6398 Clip
 6399 Carrier for draw rod


Fitting Information

Bracket and profile Positioning

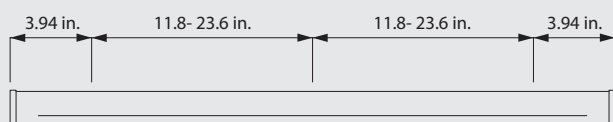


These fixing distances are a guide only, they may vary in practice depending on surface and curtain weight.

Handling of fixing clamp 3825

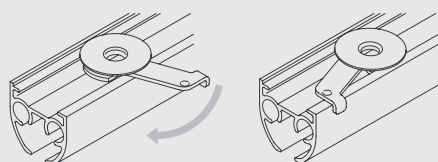

Higher edge of profile to the roomside.
 Clamp arm to the window.



Handling of fixing bracket 3832

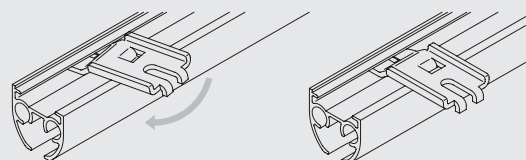

Higher edge of profile to the roomside.



Fitting Options

Ceiling fix with clamp 3825





Min. distance from wall when using Wave XL: **8.66 in.**

Ceiling fix with bracket 3832




Min. distance from wall when using Wave XL: **8.66 in.**

Ceiling fix with bracket 3826





Min. distance from wall when using Wave XL: **8.66 in.**

Wall fix with brackets 3134-39 and bracket 3826

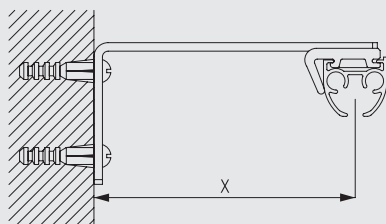


	x (in.)	W (in.)	Y (in.)	Z (in.)
3134	n/a	n/a	n/a	n/a
3135	2.84	-	1.97	1.97
3136	3.62	-	1.97	1.97
3137	4.4	-	3.15	1.97
3138	5.59	2.36	3.15	2.36
3139	7.56	3.35	3.15	3.35




The distances identified in ALL of the fitting options above may vary depending on the Wave heading requirements. Please refer to the Wave Curtain Make-up Guide (available at www.silentgliss.co.uk) for exact measurements.

Wall fix with adjustable brackets 3275-77

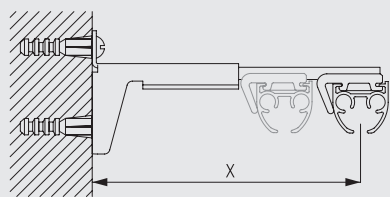

	x (in.)
3275	3.7
3276	4.57
3277	5.75



3271
Adjustable bracket
base



3272-74
Bracket arm



3826
Top fix bracket

The distance may vary depending on the Wave heading requirements. Please refer to the Wave Curtain Make-up Guide (available on the Silent Gliss Extranet) for exact measurements.

Standard Accessories

3825 Clamp (35mm)



3842 End cover



6345 Wave glider cord (60mm)



1148C Countersunk screw


3841 Profile



6064 Screw twist endstop



6346 Wave glider cord (80mm)



Optional Accessories




2216 Cord




3134 Extension bracket (60mm)



3136 Extension bracket (100mm)




3138 Extension bracket (150mm)




3275 Adjustable extension bracket set (69mm)



3277 Adjustable extension bracket set (122mm)



3832 Twist clamp



6349 Wave curtain heading tape




6394 Carrier




3133 Bracket cover (60mm)




3135 Extension bracket (80mm)



3137 Extension bracket (120mm)



3139 Extension bracket (200mm)



3276 Adjustable extension bracket set (92mm)



3826 Top fix bracket



6007 Endstop









6382 Limit stop



3133L Extended bracket cover for 3138/9



Wave Accessories

2216	Cord		2255	Adjustable brake	
3582	Hook		6007	Endstop	
6345	Wave glider cord (60mm)		6346	Wave glider cord (80mm)	
6349	Curtain tape		6363	Top hemming tape	
6364	Extension		6365	Hanger	
6366	Carrier for draw rod		6391	Hanger	
6392	Heading film		6393	Glider	
6395	Extension		6398	Clip	
6399	Carrier for Draw rod		10075	Lead weight 50 gr/m	
10076	Fabric weight		6098W	Wave roller glider cord (80mm)	





3840W

www.SilentGlissAmerica.com

Silent Gliss Inc
United States Distribution
755 East 134th street
3rd Floor.
Bronx, NY 10454

Correspondence:
P.O. Box 592
New York, Ny 10150

Please call or email
with any questions or for technical catalogs:
info@SilentGlissAmerica.com
Tel: 718-412-9040